

## CEE Floor boxes: 7022A-1-3


### Specification:

|                        |                                                                                                                             |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>Item No:</b>        | 7022A-1-3                                                                                                                   |
| <b>Product line:</b>   | CEE Floor boxes                                                                                                             |
| <b>Units:</b>          | 4                                                                                                                           |
| <b>Mounting (qty):</b> | 2 x earthed socket<br>1 x CEE 5/16A 400V/6h<br>1 x CEE 5/32A 400V/6h                                                        |
| <b>Construction:</b>   | Round                                                                                                                       |
| <b>Ground:</b>         | <ul style="list-style-type: none"> <li>• Suitable for stone, concrete and asphalt</li> <li>• Suitable for screed</li> </ul> |
| <b>Type of inst.:</b>  | Flush mounted                                                                                                               |
| <b>Lid character.:</b> | <ul style="list-style-type: none"> <li>• Lockable with tool</li> <li>• Removable</li> </ul>                                 |
| <b>Environment:</b>    | Outdoor area                                                                                                                |
| <b>EAN:</b>            | 4058796001790                                                                                                               |



### Technical data:

|                            |                                                                                                                                                                                        |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Protection class:</b>   | IP 67 (in unused condition)<br>IP 00 (in used condition)                                                                                                                               |
| <b>electr. Protection:</b> | SK I                                                                                                                                                                                   |
| <b>Material:</b>           | <ul style="list-style-type: none"> <li>• Housing made of solid aluminum</li> <li>• Lid made of solid aluminum</li> <li>• Equipment carrier made of stainless steel (1.4301)</li> </ul> |
| <b>Colour:</b>             | Aluminum (nature)                                                                                                                                                                      |
| <b>Surface:</b>            | Anodised                                                                                                                                                                               |
| <b>Weight:</b>             | 7,80 kg                                                                                                                                                                                |
| <b>Dimensions:</b>         | Ø: 250 mm<br>height: 148 mm                                                                                                                                                            |
| <b>Floor inst. depth:</b>  | 148 mm                                                                                                                                                                                 |
| <b>Supply line:</b>        | 3 x bottom; each Ø 25 mm; 2 x lateral each M25 x 1,5 mm                                                                                                                                |
| <b>Load:</b>               | 900 kg                                                                                                                                                                                 |

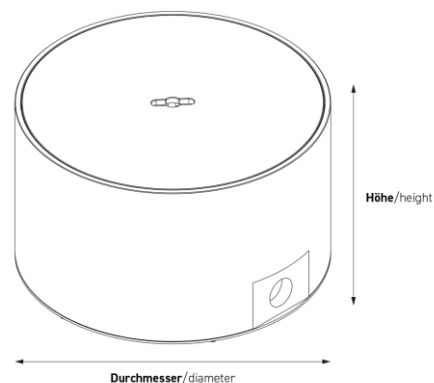

### Features:

|                  |                            |
|------------------|----------------------------|
| <b>Features:</b> | Complete and pre-assembled |
|------------------|----------------------------|